

# Technical specification LEDARE LED light bulbs

<b>Article number:</b>	00301423
<b>Product name:</b>	LEDARE LED bulb E27 600lm dimmable/globe clear
<b>Type number:</b>	LED1423G9/LED1427G9
<b>Supplier number:</b>	22858/21633
<b>Information</b>	
Nominal luminous flux	600 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	2700K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	120 x 60
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	8.6 W
Rated luminous flux	600 lm
Rated lamp life time	25000 h
Lamp power factor	0.7
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	87
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

<b>Article number:</b>	90287106
<b>Product name:</b>	LEDARE LED bulb E27 5000K globe/opal white 600lm
<b>Type number:</b>	LED1420G8K5
<b>Supplier number:</b>	21633
<b>Information</b>	
Nominal luminous flux	600 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	5000K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	120 x 60
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	8 W
Rated luminous flux	600 lm
Rated lamp life time	25000 h
Lamp power factor	0.7
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	80
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

<b>Article number:</b>	70287107
<b>Product name:</b>	LEDARE LED bulb E27 4000K globe/opal white 600lm
<b>Type number:</b>	LED1402G8K4
<b>Supplier number:</b>	21633
<b>Information</b>	
Nominal luminous flux	600 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	4000K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	120 x 60
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	8 W
Rated luminous flux	600 lm
Rated lamp life time	25000 h
Lamp power factor	0.7
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	80
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

<b>Article number:</b>	50287170
<b>Product name:</b>	LEDARE LED bulb E27 5000K globe/opal white 1000lm
<b>Type number:</b>	LED1419G12K5
<b>Supplier number:</b>	21633
<b>Information</b>	
Nominal luminous flux	1000 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	5000K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	125 x 60
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	13 W
Rated luminous flux	1000 lm
Rated lamp life time	25000 h
Lamp power factor	0.7
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	80
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

<b>Article number:</b>	70287254
<b>Product name:</b>	LEDARE LED bulb E27 4000K globe/opal white 1000lm
<b>Type number:</b>	LED1401G12K4
<b>Supplier number:</b>	21633
<b>Information</b>	
Nominal luminous flux	1000 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	4000K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	125 x 60
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	13 W
Rated luminous flux	1000 lm
Rated lamp life time	25000 h
Lamp power factor	0.7
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	80
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

<b>Article number:</b>	20249226
<b>Product name:</b>	LEDARE LED bulb E27 1000lm dimmable/glob opal95
<b>Type number:</b>	LED1337G15/LED1341G15
<b>Supplier number:</b>	19972/21633
<b>Information</b>	
Nominal luminous flux	1000 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	2700K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	128 x 95
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	14.2 W
Rated luminous flux	1000 lm
Rated lamp life time	25000 h
Lamp power factor	0.7
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	87
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

<b>Article number:</b>	10266221
<b>Product name:</b>	LEDARE N LED bulb E27 600lm dimmable/globe opal
<b>Type number:</b>	LED1306G10/LED1339G10/LED1424G10
<b>Supplier number:</b>	21633/22237
<b>Information</b>	
Nominal luminous flux	600 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	2700K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	120 x 60
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	10 W
Rated luminous flux	600 lm
Rated lamp life time	25000 h
Lamp power factor	0.7
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	87
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

<b>Article number:</b>	60255362
<b>Product name:</b>	LEDARE LED bulb E27 600lm dimmable/globe clear
<b>Type number:</b>	LED1307G10/LED1340G10
<b>Supplier number:</b>	21633
<b>Information</b>	
Nominal luminous flux	600 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	2700K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	120 x 60
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	10 W
Rated luminous flux	600 lm
Rated lamp life time	25000 h
Lamp power factor	0.7
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	87
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable




<b>Article number:</b>	20254369
<b>Product name:</b>	LEDARE LED bulb G4 80 lm
<b>Type number:</b>	LED1317G1
<b>Supplier number:</b>	21633
<b>Information</b>	
Nominal luminous flux	80 lm
Nominal life time of the lamp	20000 h
Number of switching cycles	20000
Colour temperature	2700K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Not dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	80 x 14.4
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	1.1 W
Rated luminous flux	80 lm
Rated lamp life time	20000 h
Lamp power factor	1
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	80
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

<b>Article number:</b>	40288066
<b>Product name:</b>	LEDARE NN LED bulb E27 200lm globe opal white
<b>Type number:</b>	LED1320G3/LED1325G3
<b>Supplier number:</b>	19972/21633
<b>Information</b>	
Nominal luminous flux	200 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	2700K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Not dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	72 x 45
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	3.5 W
Rated luminous flux	200 lm
Rated lamp life time	25000 h
Lamp power factor	0.5
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	87
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

<b>Article number:</b>	60288013
<b>Product name:</b>	LEDARE NN LED bulb E14 200lm chandelier opal wh
<b>Type number:</b>	LED1321C3/LED1326C3
<b>Supplier number:</b>	19972/21633
<b>Information</b>	
Nominal luminous flux	200 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	2700K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Not dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	102 x 35
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	3.5 W
Rated luminous flux	200 lm
Rated lamp life time	25000 h
Lamp power factor	0.5
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	87
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable


<b>Article number:</b>	70288022
<b>Product name:</b>	LEDARE N LED bulb GU5.3 MR16 200lm
<b>Type number:</b>	LED1336R4
<b>Supplier number:</b>	21633
Nominal luminous flux	200 lm
Nominal life time of the lamp	25000 h
Colour temperature	2700K
Number of switching cycles	25000
warm-up time up to 60% of the full light output	Instant full light
A warning if the lamp cannot be dimmed	Not dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	47.5 x 50
Nominal beam angle	36°
Warning that the lamp is suitable for accent lighting	Not applicable
Drawing comparing lamp dimensions with equivalent filament lamp	Not applicable
Type to be displayed according to Table 6	Not applicable
Claimed equivalent lamp power of an incandescent	Not applicable
If the lamp contain mercury: Lamp mercury content	No
If the lamp contain mercury: Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	3.5 W
Rated luminous flux	200 lm
Rated lamp life time	25000 h
Lamp power factor	0.5
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	80
Colour consistency	6 steps
Rated peak intensity in candela	400
If intended for use in outdoor or industrial applications	Not applicable
Spectral power distribution in the range 180-800nm	See below
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

## Spectral Distribution

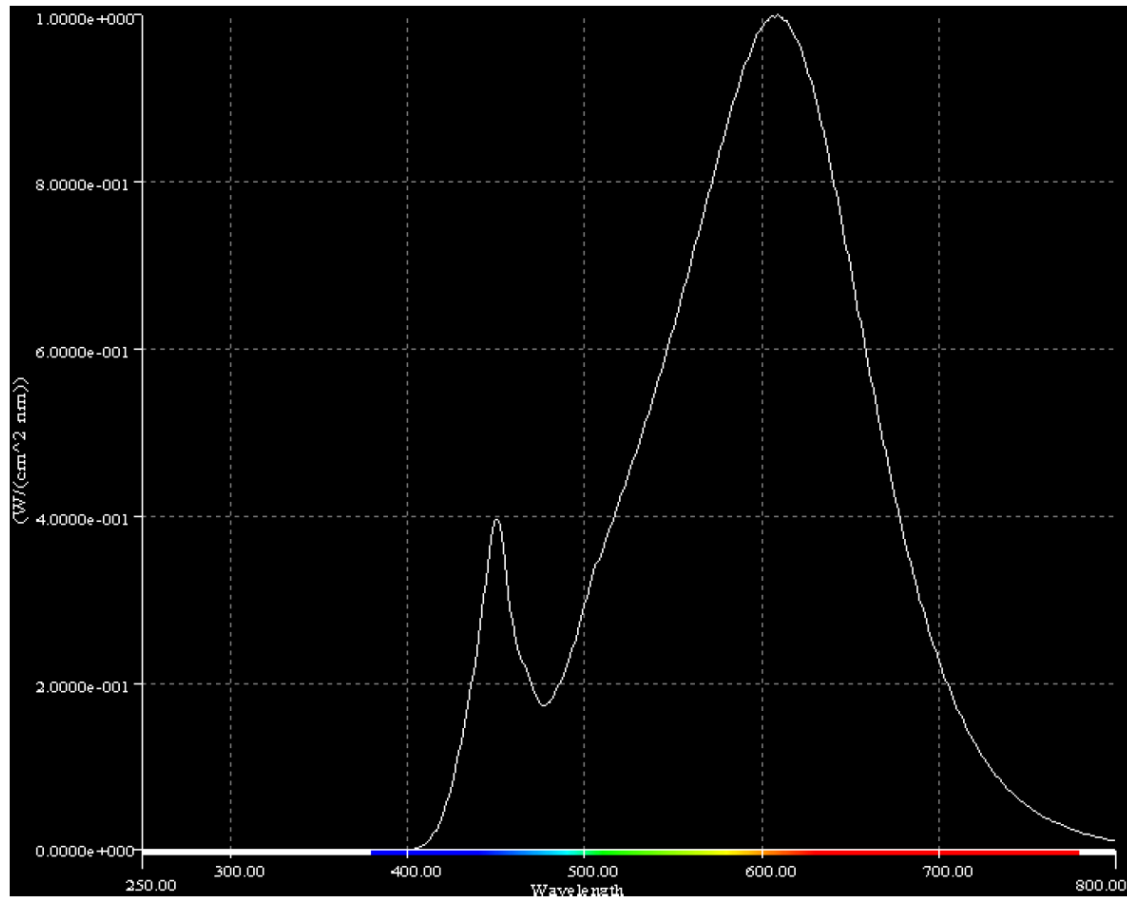

<b>Article number:</b>	60288027
<b>Product name:</b>	LEDARE N LED bulb GU4 90lm
<b>Type number:</b>	LED1335R2
<b>Supplier number:</b>	21633
Nominal luminous flux	90 lm
Nominal life time of the lamp	25000 h
Colour temperature	2700K
Number of switching cycles	25000
warm-up time up to 60% of the full light output	Instant full light
A warning if the lamp cannot be dimmed	Not dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	41 x 35
Nominal beam angle	36°
Warning that the lamp is suitable for accent lighting	Not applicable
Drawing comparing lamp dimensions with equivalent filament lamp	Not applicable
Type to be displayed according to Table 6	Not applicable
Claimed equivalent lamp power of an incandescent	Not applicable
If the lamp contain mercury: Lamp mercury content	No
If the lamp contain mercury: Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	1.25 W
Rated luminous flux	90 lm
Rated lamp life time	25000 h
Lamp power factor	0.5
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	80
Colour consistency	6 steps
Rated peak intensity in candela	200
If intended for use in outdoor or industrial applications	Not applicable
Spectral power distribution in the range 180-800nm	See below
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable


## Spectral Distribution

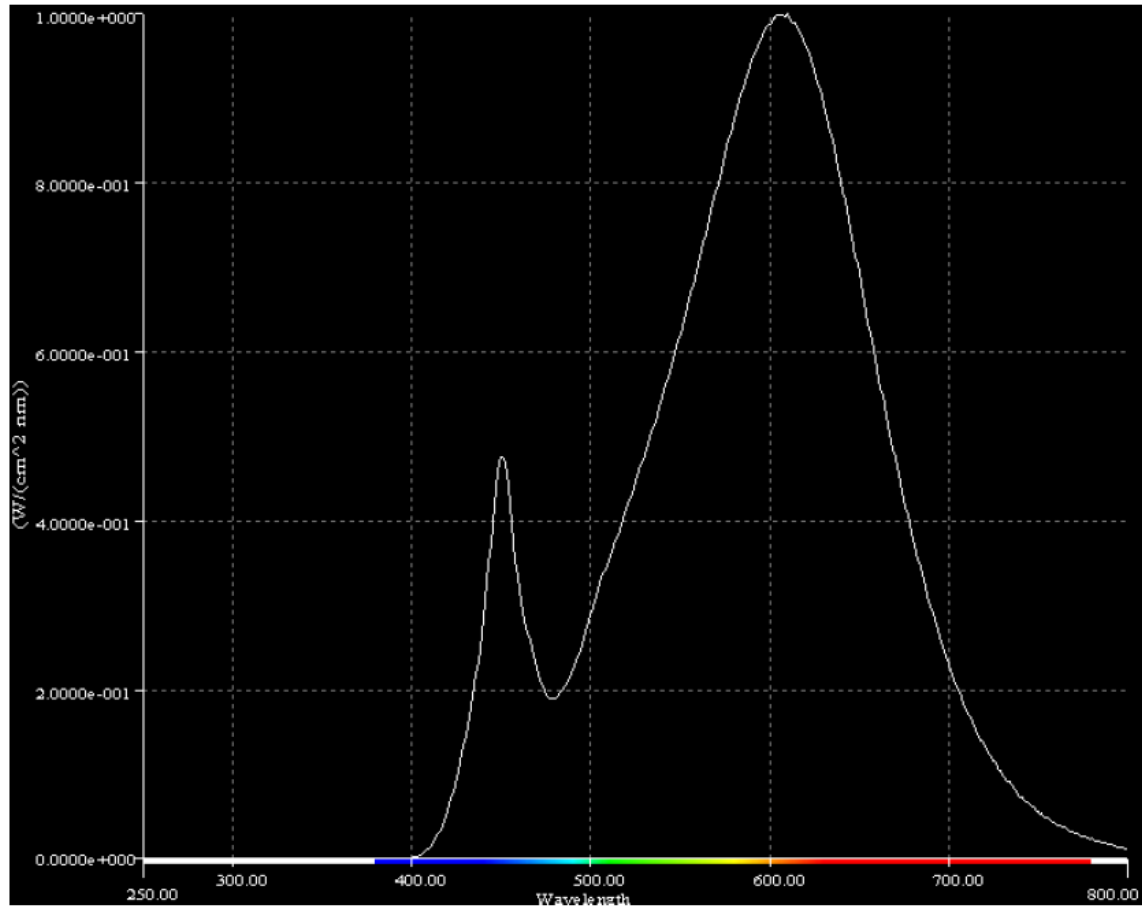

<b>Article number:</b>	40288052
<b>Product name:</b>	LEDARE N LED bulb GU10 400lm dimmable
<b>Type number:</b>	LED1334R7
<b>Supplier number:</b>	21633
Nominal luminous flux	400 lm
Nominal life time of the lamp	25000 h
Colour temperature	2700K
Number of switching cycles	25000
warm-up time up to 60% of the full light output	Instant full light
A warning if the lamp cannot be dimmed	Dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	60 x 50
Nominal beam angle	36°
Warning that the lamp is suitable for accent lighting	Not applicable
Drawing comparing lamp dimensions with equivalent filament lamp	Not applicable
Type to be displayed according to Table 6	Not applicable
Claimed equivalent lamp power of an incandescent	Not applicable
If the lamp contain mercury: Lamp mercury content	No
If the lamp contain mercury: Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	6.3 W
Rated luminous flux	400 lm
Rated lamp life time	25000 h
Lamp power factor	0.7
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	80
Colour consistency	6 steps
Rated peak intensity in candela	1000
If intended for use in outdoor or industrial applications	Not applicable
Spectral power distribution in the range 180-800nm	See below
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable




## Spectral Distribution

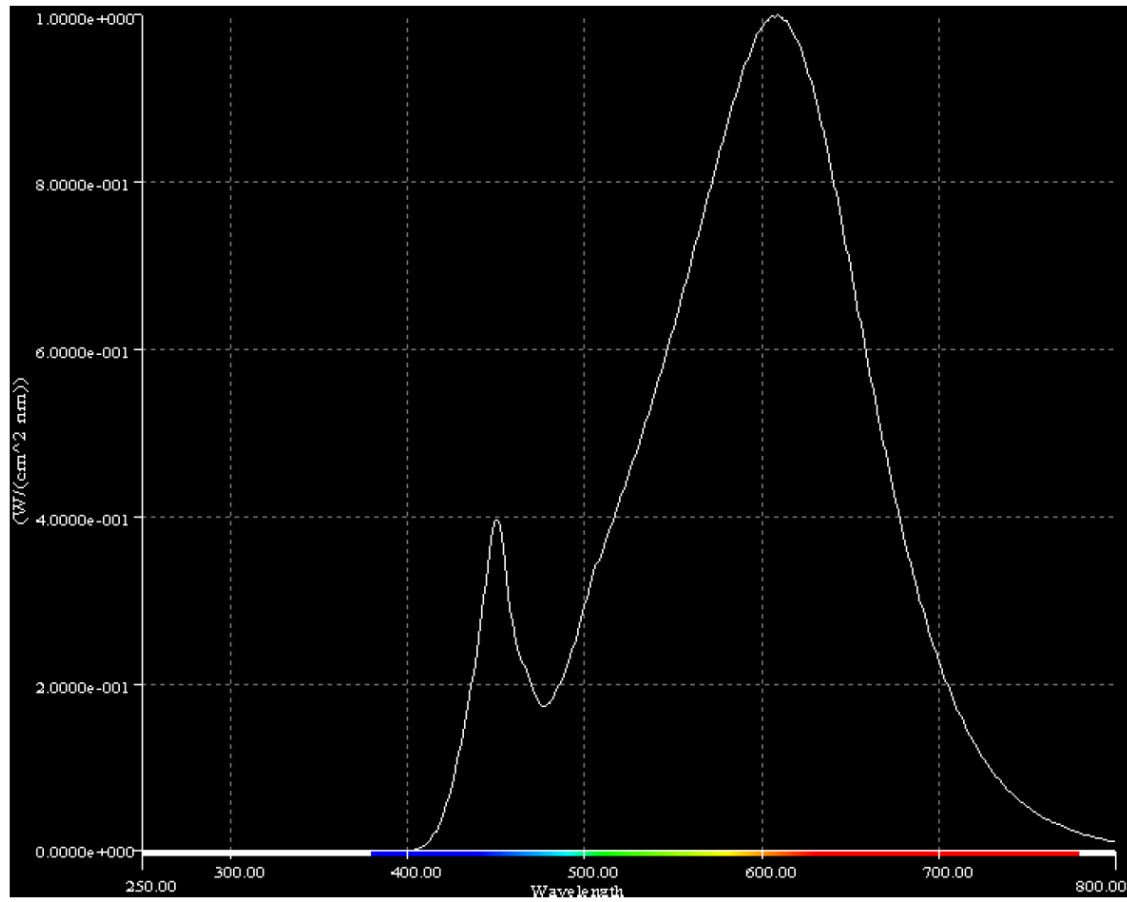


<b>Article number:</b>	80287989
<b>Product name:</b>	LEDARE N LED blb E14 refl R50 200lm
<b>Type number:</b>	LED1318R4/LED1329R4
<b>Supplier number:</b>	22237/21633
Nominal luminous flux	200 lm
Nominal life time of the lamp	25000 h
Colour temperature	2700K
Number of switching cycles	25000
warm-up time up to 60% of the full light output	Instant full light
A warning if the lamp cannot be dimmed	Not dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	83.5 x 50
Nominal beam angle	36°
Warning that the lamp is suitable for accent lighting	Not applicable
Drawing comparing lamp dimensions with equivalent filament lamp	Not applicable
Type to be displayed according to Table 6	Not applicable
Claimed equivalent lamp power of an incandescent	Not applicable
If the lamp contain mercury: Lamp mercury content	No
If the lamp contain mercury: Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	3.6 W
Rated luminous flux	200 lm
Rated lamp life time	25000 h
Lamp power factor	0.5
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	80
Colour consistency	6 steps
Rated peak intensity in candela	400
If intended for use in outdoor or industrial applications	Not applicable
Spectral power distribution in the range 180-800nm	See below
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

## Spectral Distribution

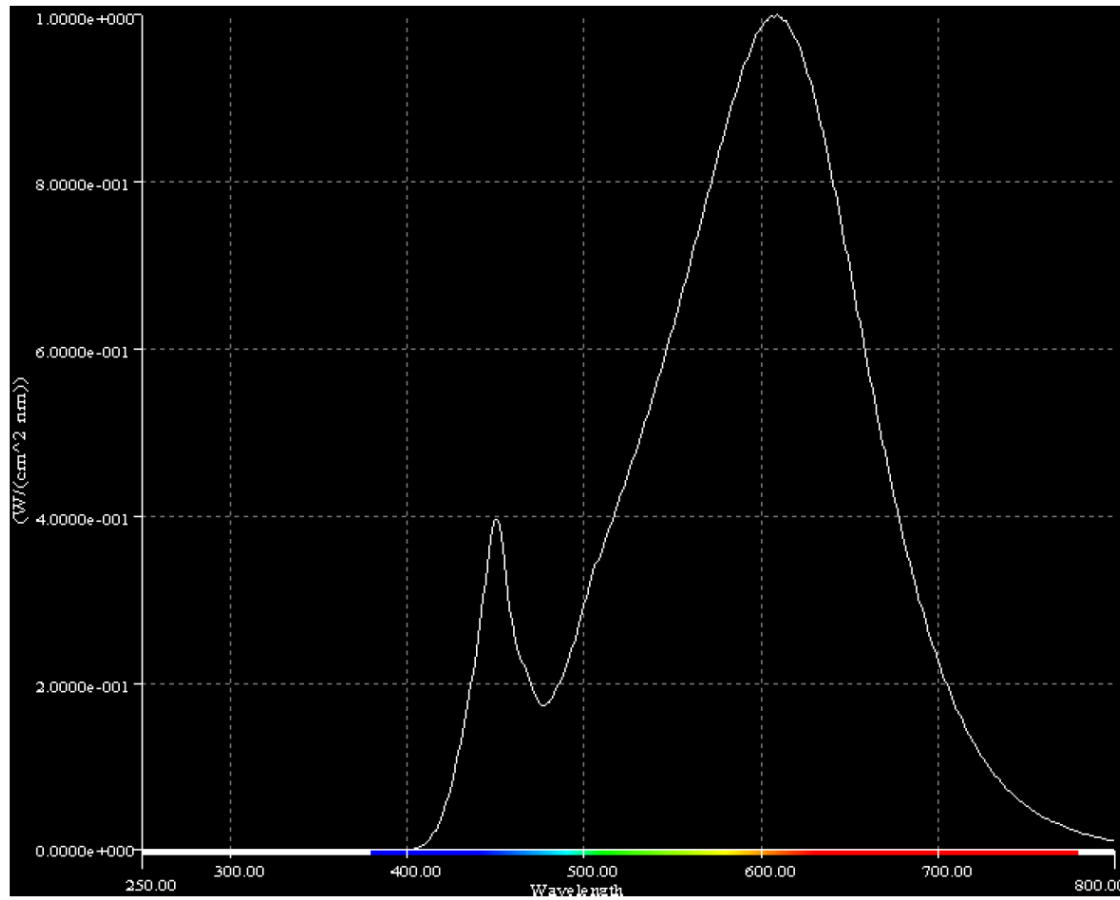

<b>Article number:</b>	80287994
<b>Product name:</b>	LEDARE N LED bulb GU10 200lm
<b>Type number:</b>	LED1319R4/LED1330R4
<b>Supplier number:</b>	22237/21633
Nominal luminous flux	200 lm
Nominal life time of the lamp	25000 h
Colour temperature	2700K
Number of switching cycles	25000
warm-up time up to 60% of the full light output	Instant full light
A warning if the lamp cannot be dimmed	Not dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	54 x 50
Nominal beam angle	36°
Warning that the lamp is suitable for accent lighting	Not applicable
Drawing comparing lamp dimensions with equivalent filament lamp	Not applicable
Type to be displayed according to Table 6	Not applicable
Claimed equivalent lamp power of an incandescent	Not applicable
If the lamp contain mercury: Lamp mercury content	No
If the lamp contain mercury: Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	3.6 W
Rated luminous flux	200 lm
Rated lamp life time	25000 h
Lamp power factor	0.5
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	80
Colour consistency	6 steps
Rated peak intensity in candela	400
If intended for use in outdoor or industrial applications	Not applicable
Spectral power distribution in the range 180-800nm	See below
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

## Spectral Distribution

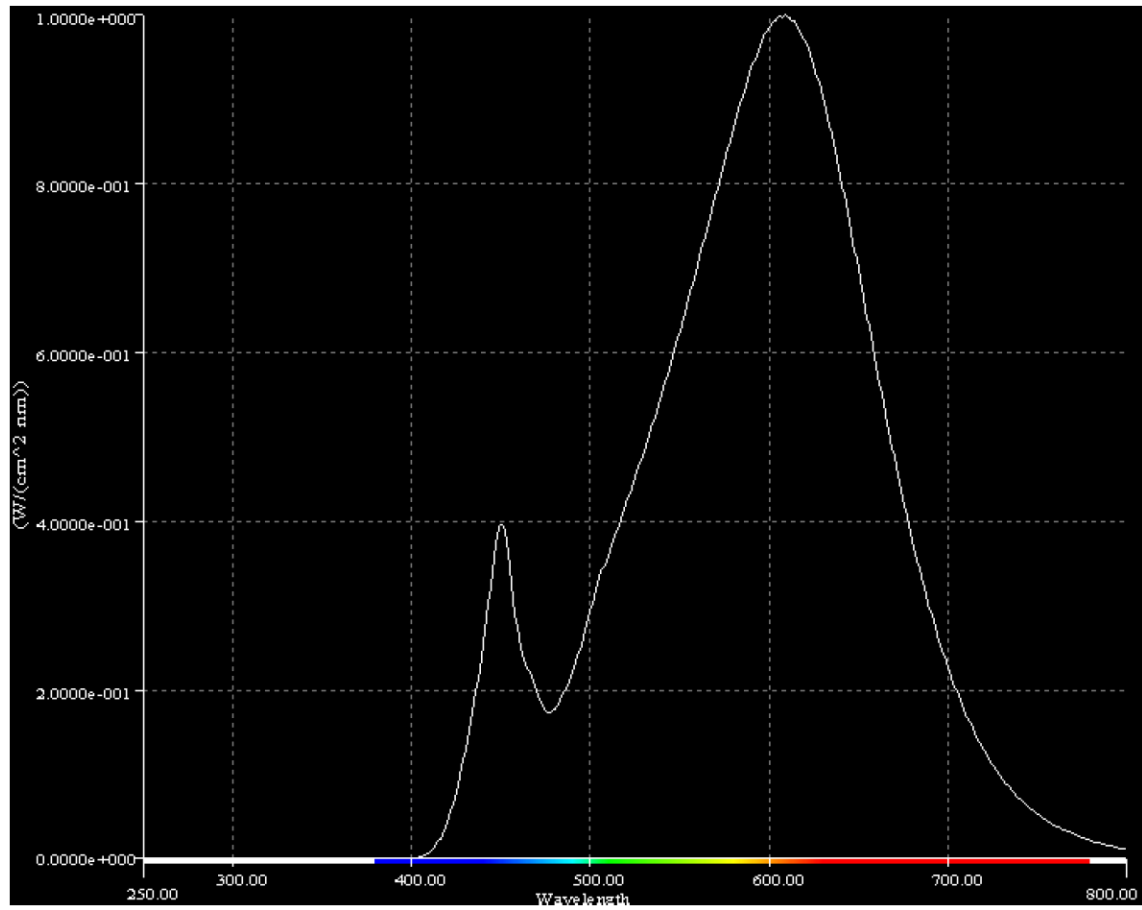

<b>Article number:</b>	00257482
<b>Product name:</b>	LEDARE LED bulb E27 1000lm dimmable/globe opal
<b>Type number:</b>	LED1309G15
<b>Supplier number:</b>	21633
<b>Information</b>	
Nominal luminous flux	1000 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	2700K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	125 x 60
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	13 W
Rated luminous flux	1000 lm
Rated lamp life time	25000 h
Lamp power factor	0.7
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	87
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

<b>Article number:</b>	80266755
<b>Product name:</b>	LEDARE LED bulb E14 400lm dimmable/globe opal
<b>Type number:</b>	LED1332G7/LED1422G6
<b>Supplier number:</b>	21633/22858
<b>Information</b>	
Nominal luminous flux	400 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	2700K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	110 x 60
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	6.3 W
Rated luminous flux	400 lm
Rated lamp life time	25000 h
Lamp power factor	0.7
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	87
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

<b>Article number:</b>	70266765
<b>Product name:</b>	LEDARE LED bulb E27 400lm dimmable/globe opal
<b>Type number:</b>	LED1332G7/LED1422G6
<b>Supplier number:</b>	21633/22858
<b>Information</b>	
Nominal luminous flux	400 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	2700K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	110 x 60
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	6.3 W
Rated luminous flux	400 lm
Rated lamp life time	25000 h
Lamp power factor	0.7
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	87
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable



<b>Article number:</b>	90290972
<b>Product name:</b>	LEDARE LED bulb E27 400lm globe/opal white 2-p
<b>Type number:</b>	LED1333G7
<b>Supplier number:</b>	21633
<b>Information</b>	
Nominal luminous flux	400 lm
Nominal life time of the lamp	15000 h
Number of switching cycles	15000
Colour temperature	2700K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Not dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	110 x 60
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	6.3 W
Rated luminous flux	400 lm
Rated lamp life time	15000 h
Lamp power factor	0.5
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	80
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

<b>Article number:</b>	10288001
<b>Product name:</b>	LEDARE N LED bulb E14 200lm chandelier clear
<b>Type number:</b>	LED1322C3/LED1327C3
<b>Supplier number:</b>	19972/21633
<b>Information</b>	
Nominal luminous flux	200 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	2700K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Not dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	102 x 35
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	3.5 W
Rated luminous flux	200 lm
Rated lamp life time	25000 h
Lamp power factor	0.5
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	87
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

<b>Article number:</b>	10288058
<b>Product name:</b>	LEDARE N LED bulb E14 400lm chandelier clear
<b>Type number:</b>	LED1324C6/LED1329C6
<b>Supplier number:</b>	19972/21633
<b>Information</b>	
Nominal luminous flux	400 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	2700K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Not dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	110 x 42
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	6.3 W
Rated luminous flux	400 lm
Rated lamp life time	25000 h
Lamp power factor	0.7
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	87
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable

<b>Article number:</b>	60288070
<b>Product name:</b>	LEDARE N LED bulb E14 400lm chandelier opal whi
<b>Type number:</b>	LED1323C6/LED1328C6
<b>Supplier number:</b>	19972/21633
<b>Information</b>	
Nominal luminous flux	400 lm
Nominal life time of the lamp	25000 h
Number of switching cycles	25000
Colour temperature	2700K
warm-up time up to 60% of the full light output	<1 sec
A warning if the lamp cannot be dimmed	Not dimmable
Optimal use in non-standard conditions	Not applicable
Lamp dimensions in millimeters	110 x 42
Lamp mercury content	No
Website to consult in case of accidental lamp breakage	Not applicable
Rated wattage	6.3 W
Rated luminous flux	400 lm
Rated lamp life time	25000 h
Lamp power factor	0.7
Lumen maintenance factor at the end of the nominal life	70%
Starting time	0.3 sec
Colour rendering	87
Instructions on how to clean up lamp debris in case of accidental breakage	Not applicable
Recommendations on how to dispose of the lamp at its end of life	Not applicable