


STRÅLA 2025

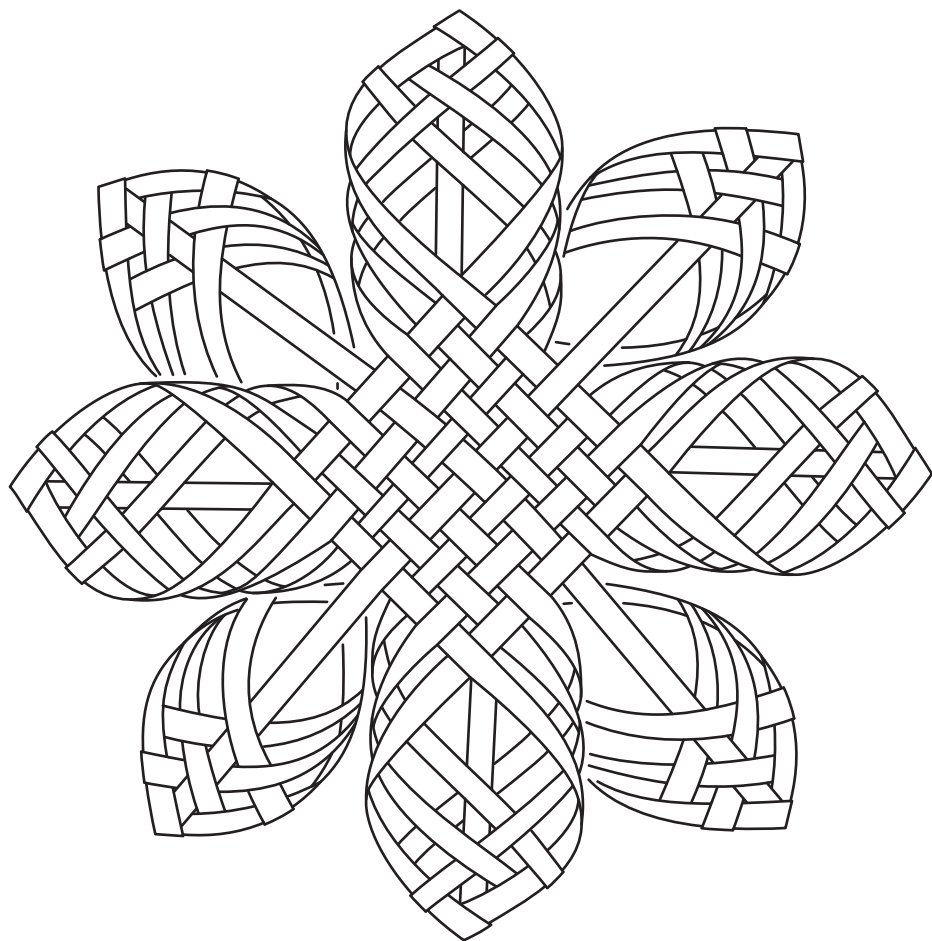

Design and Quality
IKEA of Sweden

**English**

The distance between surface of bulb and shade must be at least 30 mm.

Español

La distancia entre la bombilla y la pantalla debe ser de 30 mm como mínimo.

Portugues

A distância entre a superfície da lâmpada e o abajur deve ser de cerca de 30 mm.

中文

灯泡表面与灯罩之间需保持至少30毫米的距离。

繁中

燈泡表面與燈罩之間須保持至少3公分的距離。

한국어

전구와 전등갓은 최소 30mm의 간격을 두어야 합니다.

日本語

電球表面とシェードの間の距離は30mm以上必要です。

Bahasa Indonesia

Jarak antara permukaan bohlam dan kap setidaknyanya harus 30 mm.

Bahasa Malaysia


Jarak antara permukaan mentol dan terendak seharusnya pada sekurang-kuangnya 30 mm.



عربي

يجب أن تكون المسافة بين سطح اللبة والغطاء 30 ملم على الأقل.


ไทย

หลอดไฟและโคมควรมีระยะห่างจากกันอย่างน้อย 30 มม.

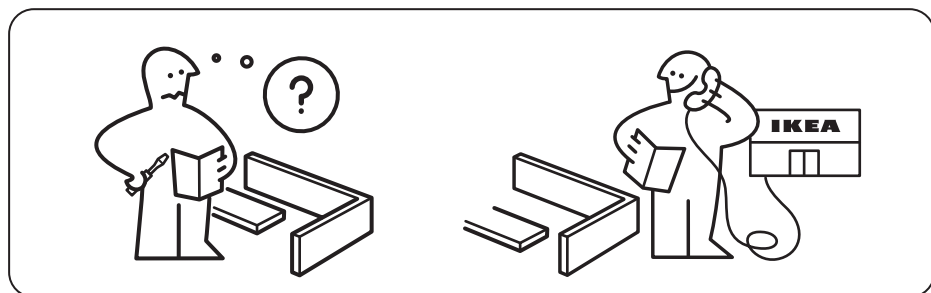



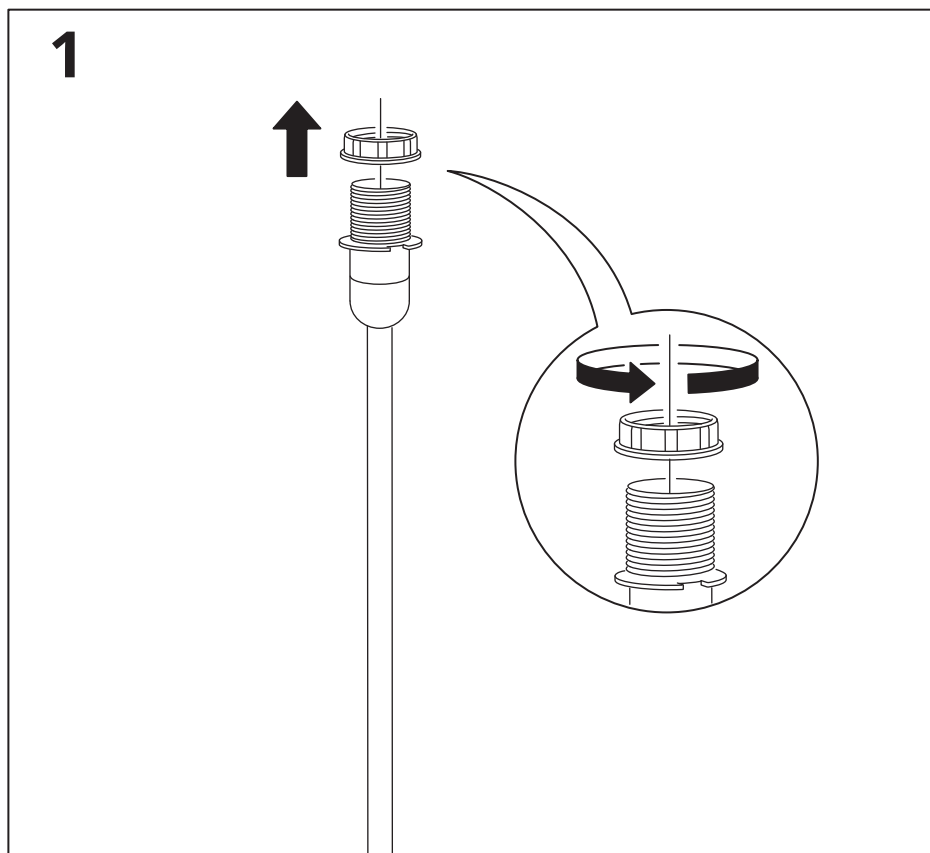
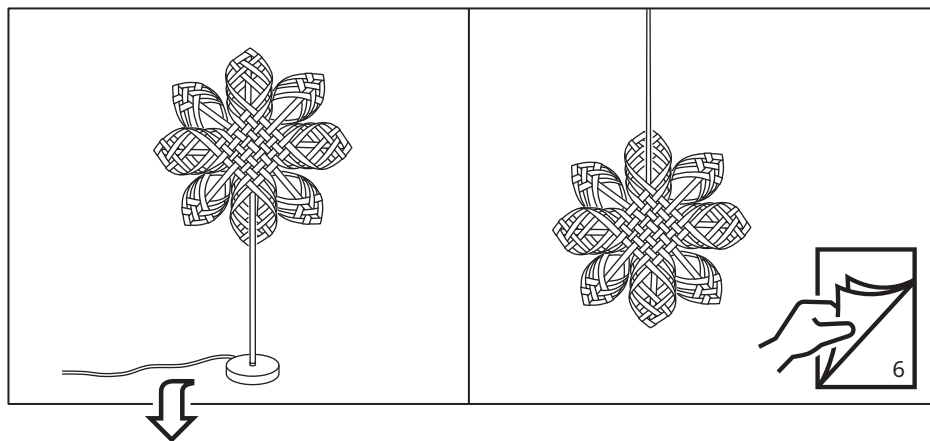


2

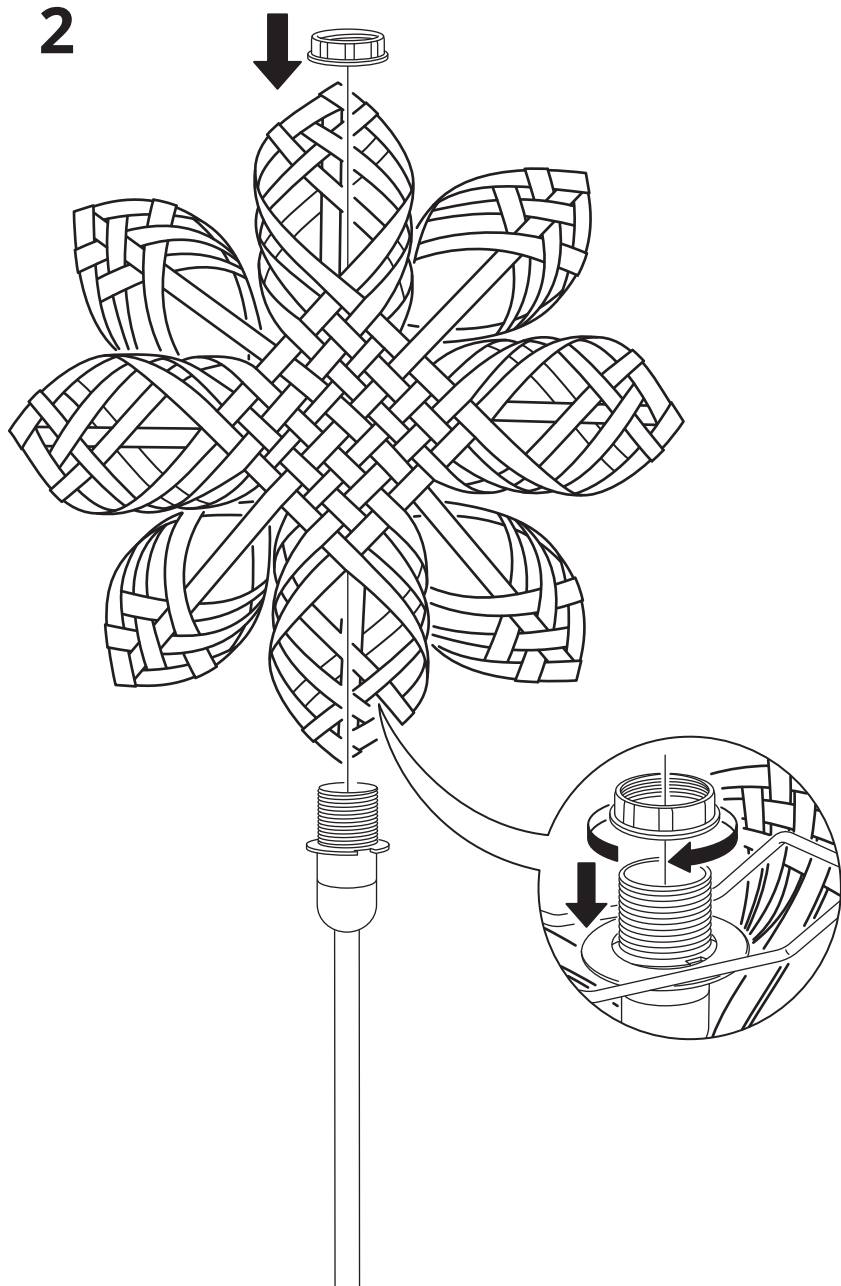


3

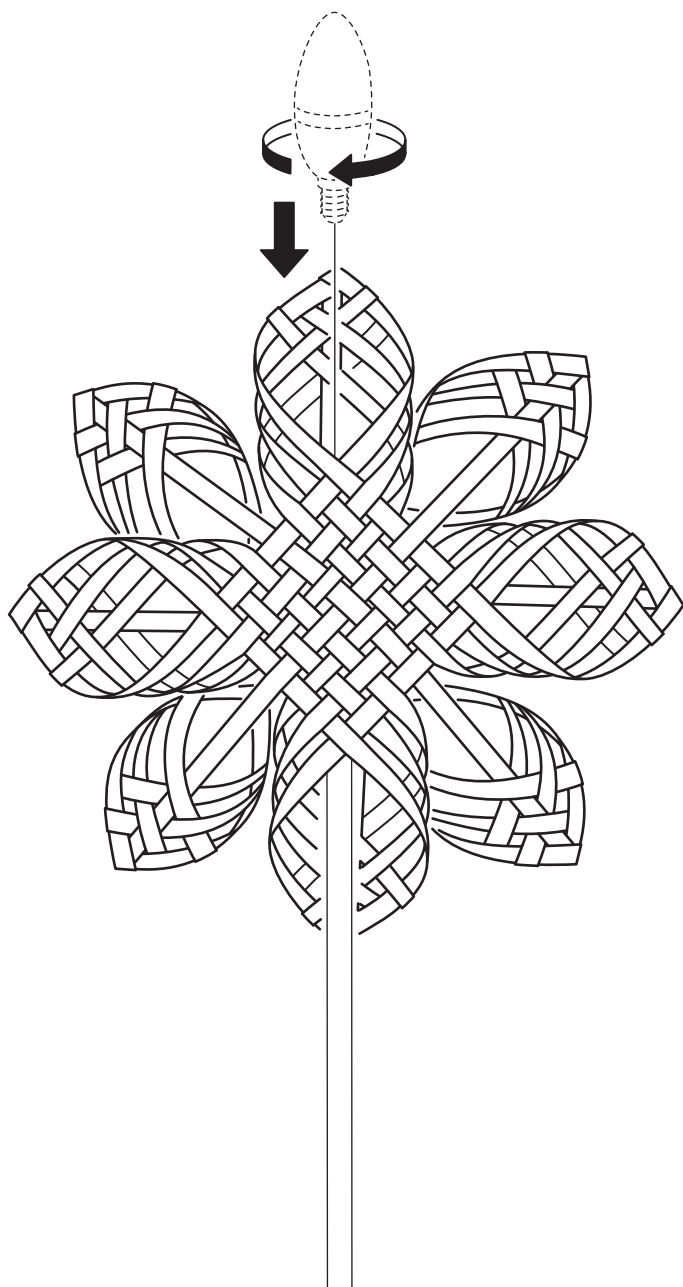

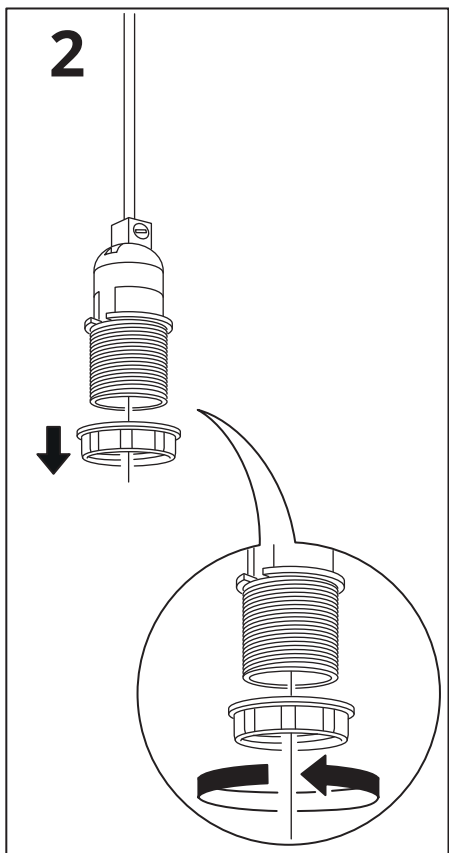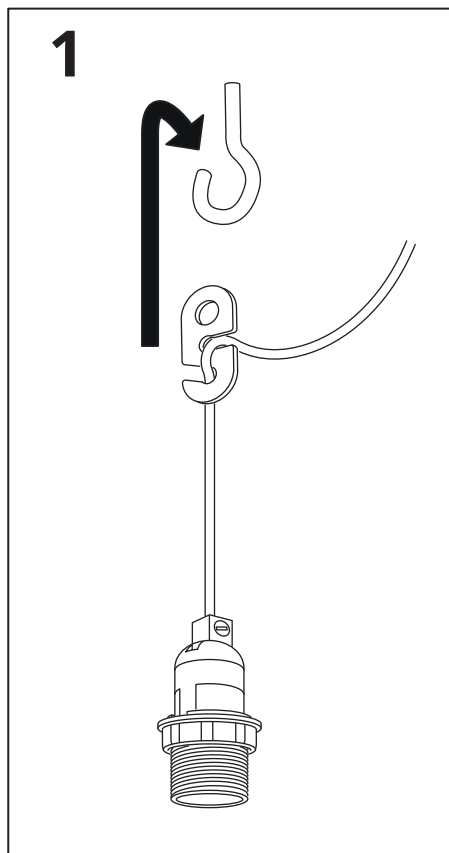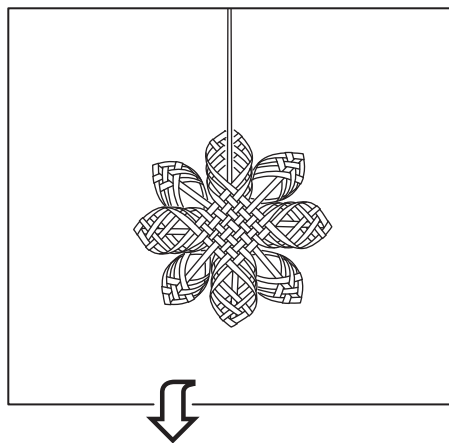

3

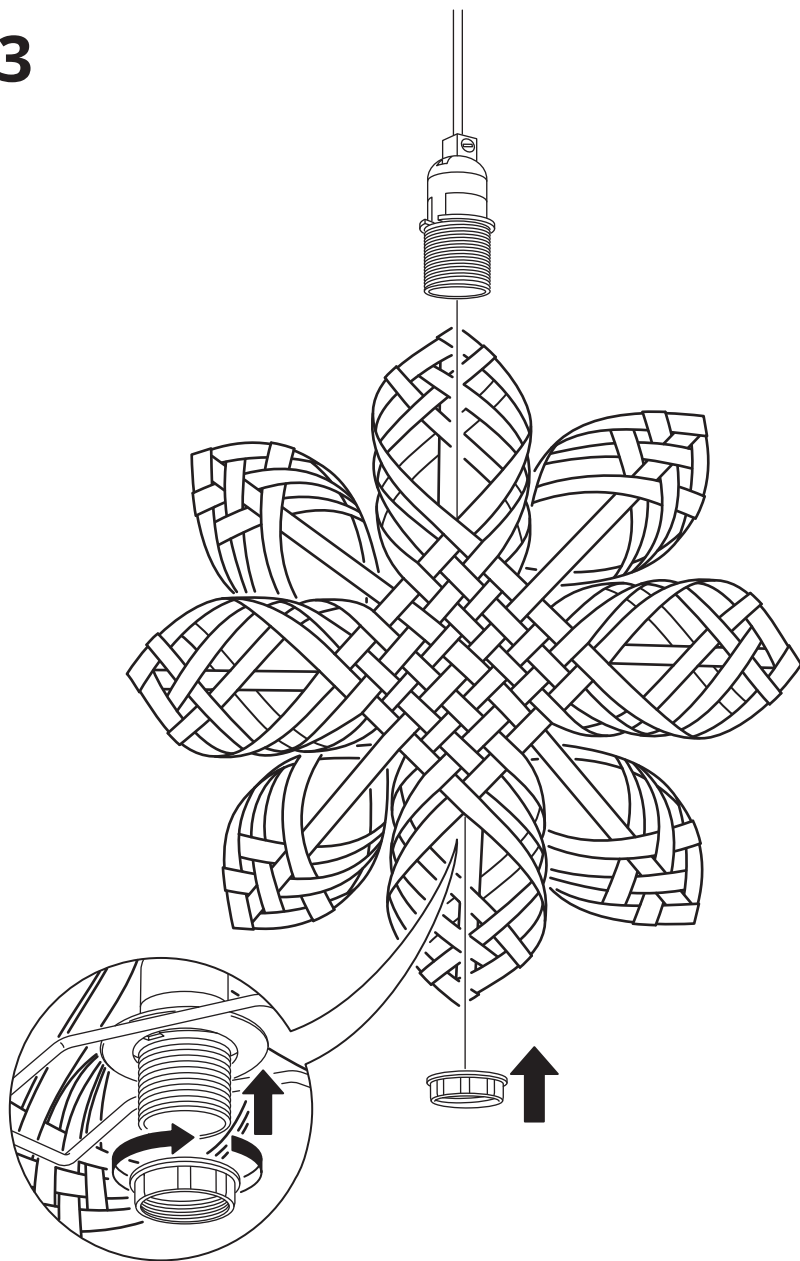

4

